



# PLC2 XXX-0512E-M

## Verdampingscondensors

### Technische gegevens


**REMARK:** Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

#### General notes

1. Standard refrigerant in- and outlet connection sizes are ND100. Consult your local BAC representative for locations. Refrigerant connections are closed and coils are filled with an inert gas.
2. Unit height is indicative. For precise value refer to certified print.
3. Shipping/operating weights indicated are for units without accessories such as sound attenuators, discharge hoods, etc. Consult factory certified prints to obtain weight additions and the heaviest section to be lifted. Operating weights shown in the tables is based on total unit weight, weight of refrigerant operating charge and basin filled to overflow level.
4. Drawings show the standard right hand arrangement (air inlet side on the right when facing the connection end). Left hand arrangement can be supplied upon request.

**Laatst bijgewerkt:** 08/01/2025

#### PLC2 XXX-0512E-M

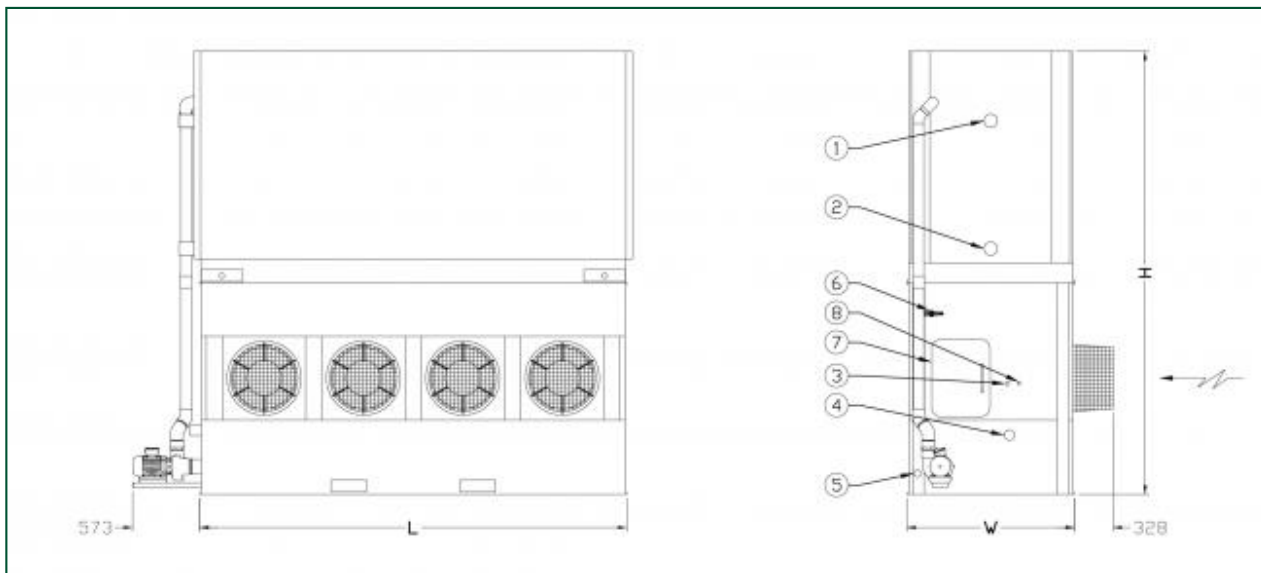

1. Koelmiddel in ND100; 2. Koelmiddel uit ND100; 3. Make-up ND40; 4. Overloop ND80; 5. Afvoer ND50; 6. Spui ND25; 7. Behandeld water in ND20; 8. Toegangsdeur.



Model	Gewicht (kg)			Afmetingen (mm)			Luchtdebi et (m <sup>3</sup> /s)	Ventilator motor (kW)	Sproeiwat erdebiet (l/s)	Pompmot or (kW)	R717-ladi ng (kg)
	Bedrijfsge wicht (kg)	Transport gewicht (kg)	Zwaarste gedeelte (kg)	L	W	H					
PLC2 0182-0 512E-M	3336	2173	1143	3651	1435	3077	21.6	(4x) 4.05	14.4	(1x) 2.2	43.0
PLC2 0200-0 512E-M	3607	2425	1282	3651	1435	3312	20.7	(4x) 4.05	14.4	(1x) 2.2	63.0
PLC2 0219-0 512E-M	3869	2667	1524	3651	1435	3547	20.0	(4x) 4.05	14.4	(1x) 2.2	83.0
PLC2 0231-0 512E-M	4133	2911	1768	3651	1435	3781	19.3	(4x) 4.05	14.4	(1x) 2.2	103.0
PLC2 0247-0 512E-M	4340	3098	1954	3651	1435	3796	18.8	(4x) 4.05	14.4	(1x) 2.2	123.0
PLC2 0255-0 512E-M	4592	3330	2187	3651	1435	3986	18.3	(4x) 4.05	14.4	(1x) 2.2	143.0